



Double Chain Sling Type D

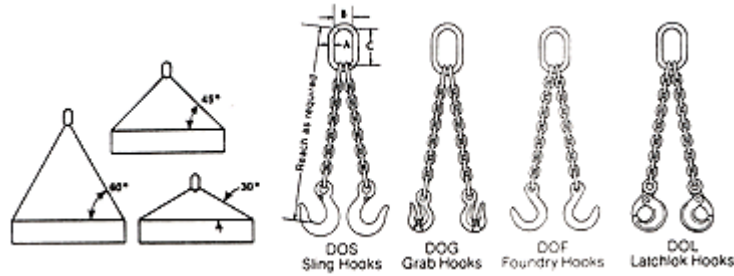

Chain size		Working load limit (lbs.)*			Oblong master link				Approx. weight (lbs.)
					Master link number	Dimensions (inches)			
(in.)	(mm)	60°	45°	30°		Diameter Material A	Inside width B	Inside length C	
7/32	5.5	3,600	3,000	2,100	HA40	13/32	1 1/2	3	8
9/32	7	6,100	4,900	3,500	HA50	1/2	2 1/2	5	9
3/8	10	12,300	10,000	7,100	HA75	3/4	2 3/4	5 1/2	18
1/2	13	20,800	17,000	12,000	HA100	1	3 1/2	7	31
5/8	16	31,300	25,600	18,100	HA125	1 1/4	4 3/8	8 3/4	49
3/4	20	49,000	40,000	28,300	HA150	1 1/2	5 1/4	10 1/2	71
7/8	22	59,200	48,400	34,200	HA175	1 3/4	6	12	98
1	26	82,600	67,400	47,700	HA200	2	7	14	132
1 1/4	32	125,200	102,200	72,300	HA225	2 1/4	8	16	221

Triple & Quad Chain Sling Type T & Q

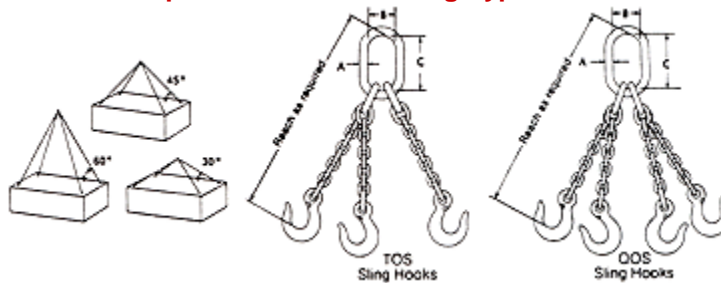

Chain size		Working load limit (lbs.)*			Oblong master link				Approx. weight (lbs.)	
					Master link number	Dimensions (inches)			Type TOS 5 ft. reach	Type QOS 5 ft. reach
(in.)	(mm)	60°	45°	30°		Diameter Material A	Inside width B	Inside length C		
7/32	5.5	5,450	4,450	3,150	HA50-SA	1/2	2 1/2	5	12	16
9/32	7	9,100	7,400	5,200	HA75-SA	3/4	2 3/4	5 1/2	14	18
3/8	10	18,400	15,100	10,600	HA100-SA	1	3 1/2	7	28	36
1/2	13	31,200	25,500	18,000	HA125-SA	1 1/4	4 3/8	8 3/4	50	62
5/8	16	47,000	38,400	27,100	HA150-SA	1 1/2	5 1/4	10 1/2	79	97
3/4	20	73,500	60,000	42,400	HA175-SA	1 3/4	6	12	112	137
7/8	22	88,900	72,500	51,300	HA200-SA	2	7	14	155	188
1	26	123,900	101,200	71,500	HA225-SA	2 1/4	8	16	215	260
1 1/4	32	187,800	153,400	108,400	HA275-SA	2 3/4	9	16	348	421