


Adjustable Single Chain Sling



Chain size		Working load limit (lbs.)* 60°	Link number	Oblong master link		
				Dimensions (inches)		
(in.)	(mm)			Diameter Material A	Inside width B	Inside length C
7/32	5.5	2,100	HA40	13/32	1 1/2	3
9/32	7	3,500	HA50	1/2	2 1/2	5
3/8	10	7,100	HA75	3/4	2 3/4	5 1/2
1/2	13	12,000	HA100	1	3 1/2	7
5/8	16	18,100	HA100	1	3 1/2	7
3/4	20	28,300	HA125	1 1/4	4 3/8	8 3/4
7/8	22	34,200	HA150	1 1/2	5 1/4	10 1/2
1	26	47,700	HA175	1 3/4	6	12
1 1/4	32	72,300	HA200	2	7	14

Adjustable Double Chain Sling

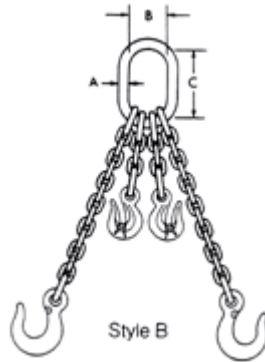

Chain size		Working load limit (lbs.)*			Oblong master link			
					Master link number	Dimensions (inches)		
(in.)	(mm)	60°	45°	30°		Diameter Material A	Inside width B	Inside length C
7/32	5.5	3,600	3,000	2,100	HA40	13/32	1 1/2	3
9/32	7	6,100	4,900	3,500	HA50	1/2	2 1/2	5
3/8	10	12,300	10,000	7,100	HA75	3/4	2 3/4	5 1/2
1/2	13	20,800	17,000	12,000	HA100	1	3 1/2	7
5/8	16	31,300	25,600	18,100	HA125	1 1/4	4 3/8	8 3/4
3/4	20	49,000	40,000	28,300	HA150	1 1/2	5 1/4	10 1/2
7/8	22	59,200	48,400	34,200	HA175	1 3/4	6	12
1	26	82,600	67,400	47,700	HA200	2	7	14
1 1/4	32	125,200	102,200	72,300	HA225	2 1/4	8	16