


Braided Slings
8-PART ROUND-BODY ERECTOR SLINGS
ASI-120-B braided sling with braided loops and sleeves

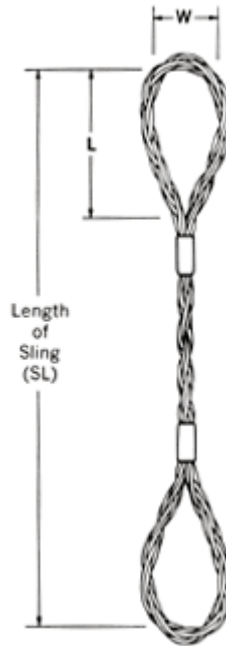

| Diam.**** of Individual Rope in. | Min Length (SL) of Sling ft. - in. | Rated Capacities** | | | | | Inside Loop Dimensions Approx. | |
|----------------------------------|------------------------------------|--------------------|---------------------|--------------|-------|-----|--------------------------------|-------|
| | | Choker Hitch*** | Single-Leg Vertical | Basket Hitch | | | | |
| | | | | 60° | 45° | 30° | W in. | L in. |
| 3/32 | 1-5 | .38 | .51 | .88 | .72 | .51 | 2 | 4 |
| 1/8 | 1-10 | .71 | .95 | 1.65 | 1.34 | .95 | 3 | 6 |
| 3/16 | 2-10 | 1.5 | 2.1 | 3.64 | 2.97 | 2.1 | 5 | 10 |
| 1/4 | 3-6 | 2.3 | 3.1 | 5.37 | 4.38 | 3.1 | 6 | 12 |
| 5/16 | 4-6 | 3.6 | 4.8 | 8.31 | 6.79 | 4.8 | 8 | 16 |
| 3/8 | 5-0 | 5.1 | 6.8 | 11.78 | 9.62 | 6.8 | 8 | 16 |
| 7/16 | 5-9 | 6.9 | 9.3 | 16.11 | 13.15 | 9.3 | 9 | 18 |
| 1/2 | 6-5 | 9.0 | 12.0 | 20.78 | 16.97 | 12 | 9 | 18 |
| 9/16 | 8-0 | 11.0 | 15.0 | 25.98 | 28.21 | 15 | 12 | 24 |
| 5/8 | 9-4 | 14.0 | 19.0 | 32.91 | 26.87 | 19 | 14 | 28 |

** Rated capacities are given in tons of 2000 lb using EIPS rope with IWRC. Rated capacities of basket hitches are based on minimum diameter of curvature at the point of load contact of 20 times the rope diameter.

***Rated capacities of choker hitches apply when the angle of choke is greater than 135°.

****Larger sizes available on request.