


Three Leg Bridle Slings
 ASI-303-E single rope legs, oblong link, eye-hoist hooks, and Flemished loops

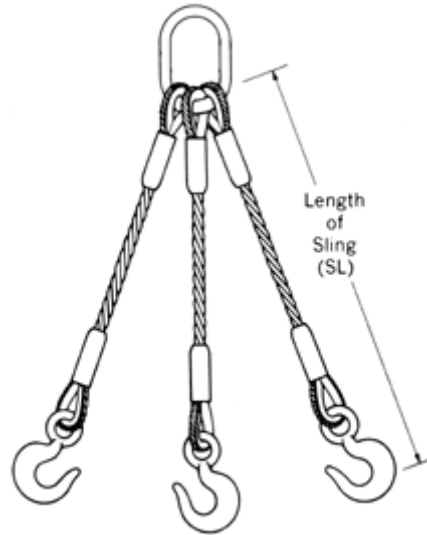

Diam.**** of Rope in.	Min Length (SL) of Sling ft. - in.	Rated Capacities** in Tons When Used	
		60°	45°
1/4	1-3	1.7	1.4
3/8	1-8	3.7	3.0
1/2	2-0	6.6	5.4
5/8	2-4	10	8.3
3/4	2-9	15	12
7/8	3-3	20	16
1	3-6	26	21
1 1/8	4-0	31	26
1 1/4	4-6	38	31
1 3/8	5-0	46	38
1 1/2	5-6	55	45
1 3/4	6-6	74	60
2	8-0	95	78

** Rated capacities are given in tons of 2000 lb using EIPS rope with IWRC. Rated capacities of basket hitches are based on minimum diameter of curvature at the point of load contact of 20 times the rope diameter.