



## Type 6

**Type VI** - Return eye (reversed eye) sling is formed by using multiple widths of webbing held edge to edge. A wear pad is attached on both sides of the sling body and on both sides of the loop eyes to form a loop eye at each end which is at a right angle to the plane of the sling body.



Code No.	Vertical	Choker	Basket	Sling Width
RE1-802	3,200	2,500	6,400	2
RE1-804	6,400	5,000	12,800	4
RE1-806	8,600	6,900	17,200	6
RE2-802	6,200	4,900	12,400	2
RE2-804	12,200	9,800	24,400	4
RE2-806	16,300	13,000	32,600	6
RE3-804	16,000	12,800	32,000	4
RE3-806	21,500	17,200	43,000	6
RE4-806	26,700	21,200	53,400	6

**Available in other widths**


**CAUTION DO NOT EXCEED RATED CAPACITIES**

**Stone Handling Slings** are made of woven nylon web reinforced with special abrasion-resistant facing yarns. This rugged material is designed expressly for lifting stone, concrete, and building panels.

Outstanding properties:

- Facing made of abrasive resistant material.
- Nylon-backed for strength
- Natural untreated web for softness and no color rub-off.
- Standard eye size is 12"

Note: Stone handling slings available in 4" width only.

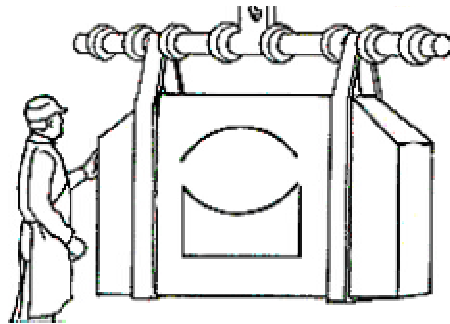

## Specifications

-	-	Rated Capacities in Lbs.		
Type	Code No.	Vertical	Choker	Basket
1	SHTC1-704	5,400	4,000	10,800
1	SHTC2-704	9,400	7,000	18,800
2	SHTT1-704	5,400	-	10,800
2	SHTT2-704	9,400	-	18,800
3-4	SHEE1-704	5,400	4,000	10,800
3-4	SHEE2-704	9,400	7,000	18,800
5	SHEN1-704	8,000	6,000	16,000
5	*SHEN2-704	8,000	6,000	16,000

\*Note: 2-ply Endless slings (SHEN2-704) have no lap. The ends are butted for free rolling over spreader. Capacities are the same as 1 ply, but both sides are faced with abrasive-resistant materials to give double use.

**CAUTION DO NOT EXCEED RATED CAPACITIES**  
**SLINGS OR ASSEMBLIES ARE NOT TO BE USED FOR TRANSPORTING PERSONNEL**